



Distributed exclusively by:

Lakeport Power Ltd.

169 Industrial Park Road

Colborne, Ontario

www.lakeportpower.com | 905-355-3281

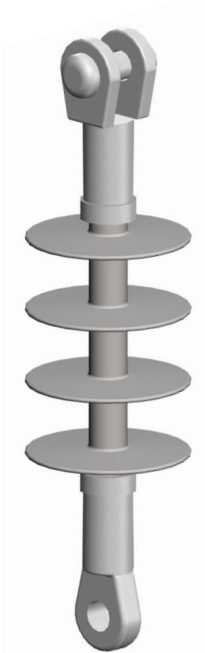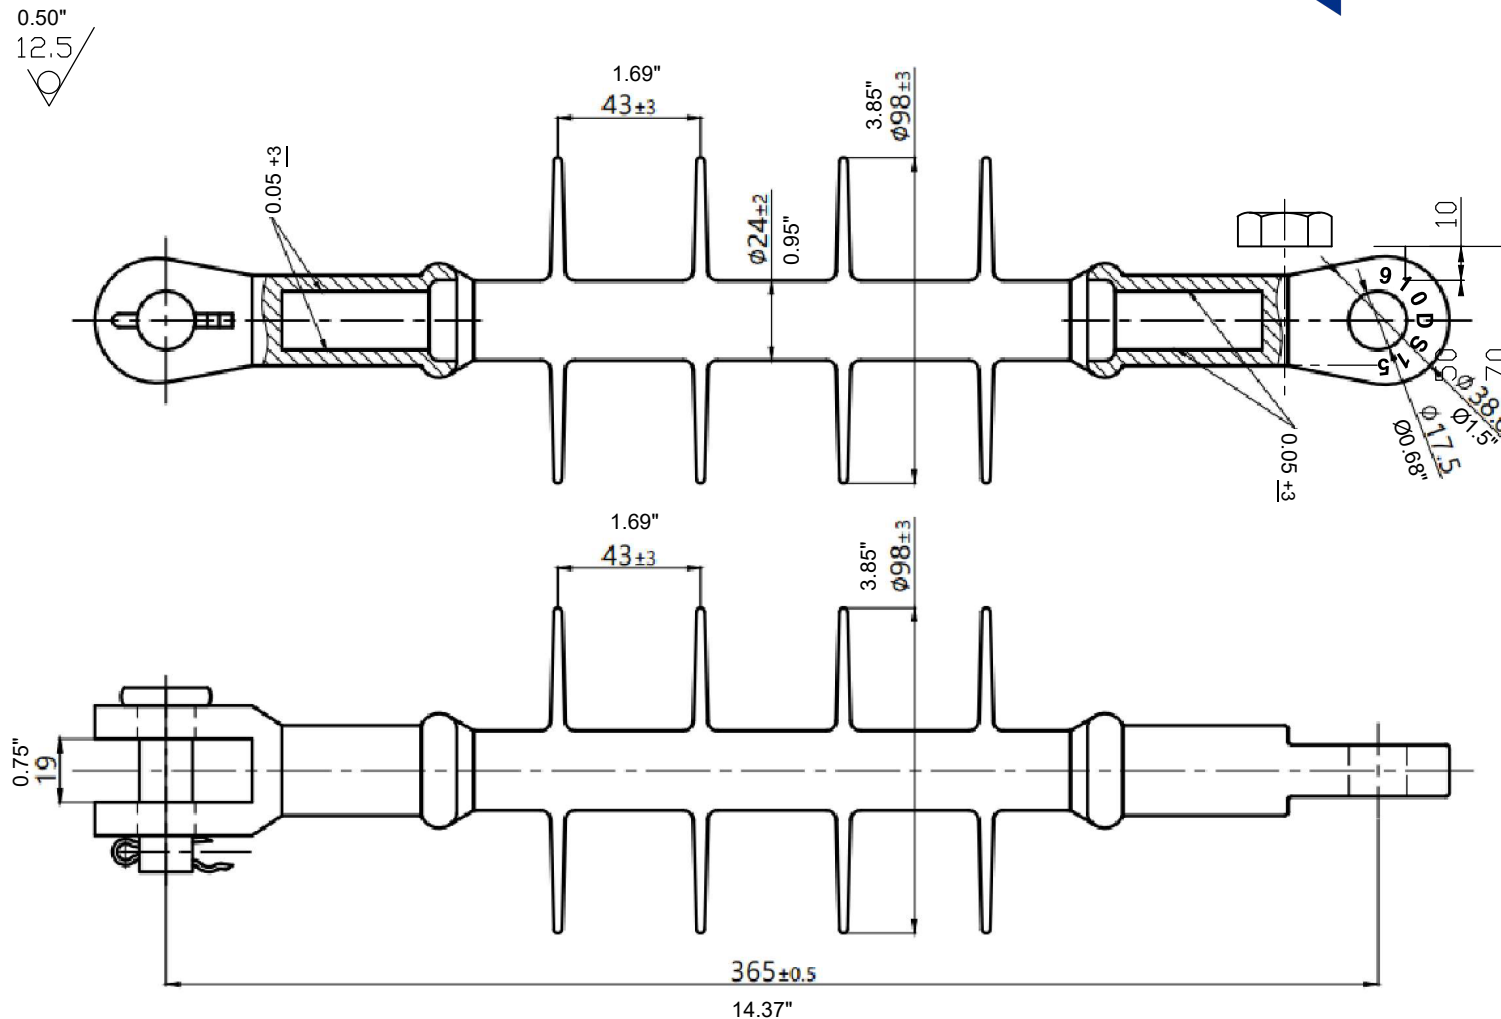

NOTES:

MIN. DRY ARCING DISTANCE: 195MM [7.68"]

MIN. LEAKAGE DISTANCE: 470MM [18.50"]

DIAMETER OF THE CORE ROD: Ø18MM

CRITICAL IMPULSE FLASHOVER VOLTAGE (POS/NEG): 140/145KV

POWER FREQUENCY FLASHOVER VOLTAGE (DRY/WET): 70/60KV

MATERIAL: EPOXY; SILICONE, END FITTING: HOT DIPPED GALVANIZED STEEL

COLOUR: GREY

Manufacturing Standard: ANSI C29.13

15kV, 70kN Dead-End Suspension Insulator

Catalog Number: 910DS15