


Distributed exclusively by:

Lakeport Power Ltd.

169 Industrial Park Road

Colborne, Ontario

www.lakeportpower.com | 905-355-3281

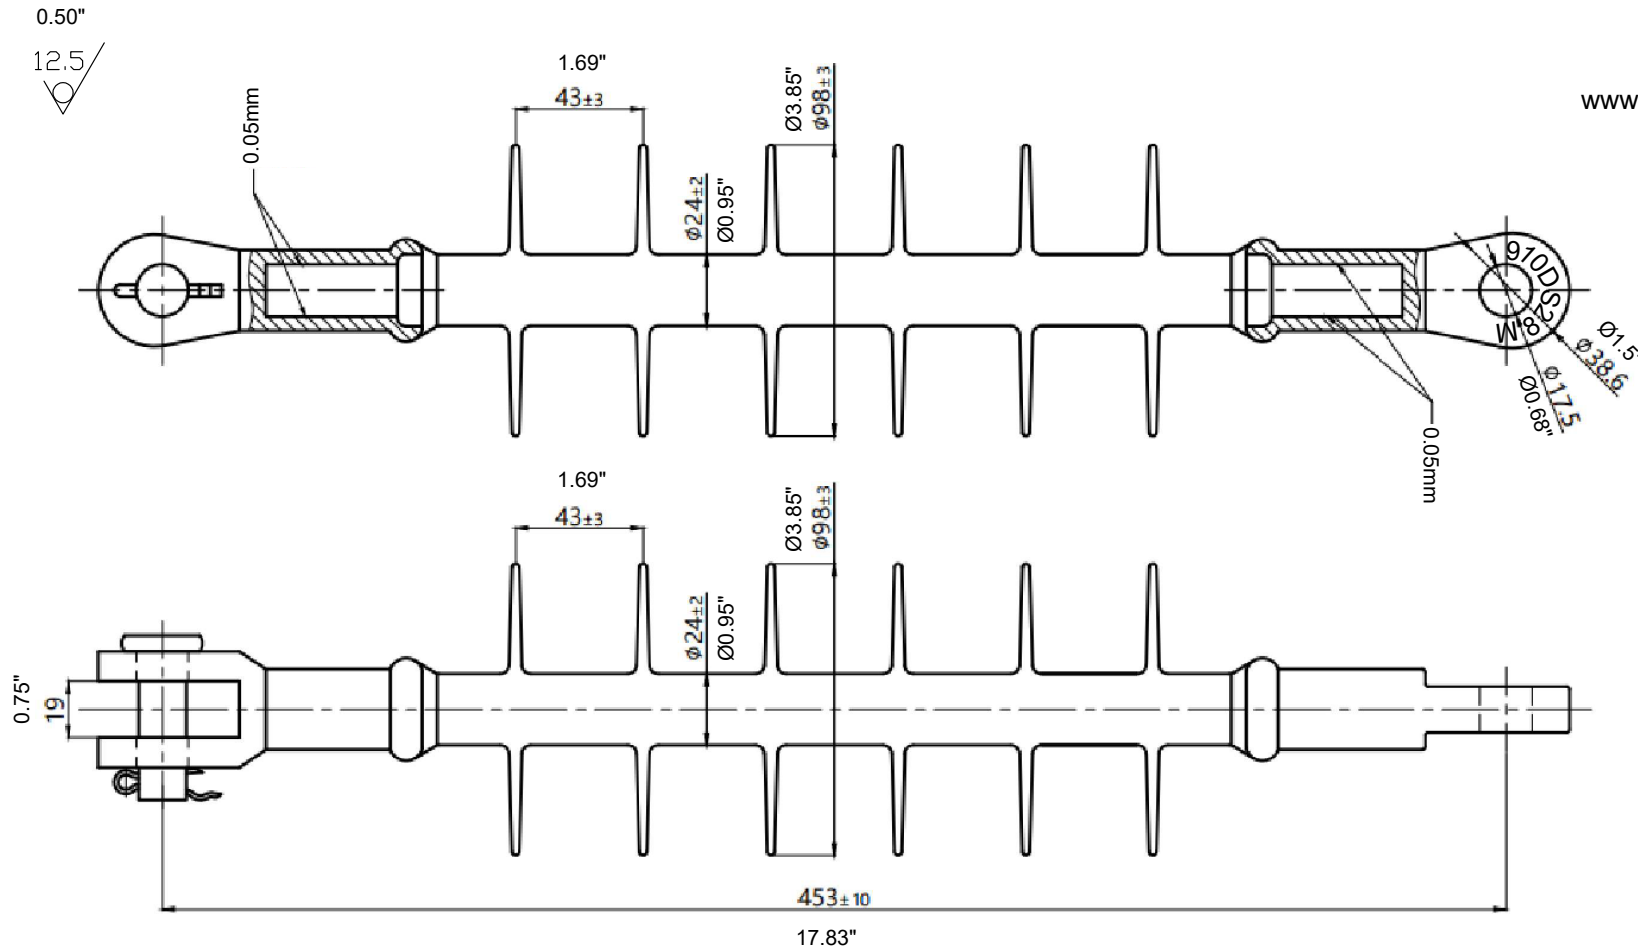

NOTES:

MIN. DRY ARCING DISTANCE: 290MM [11.42"]

MIN. LEAKAGE DISTANCE: 700MM [27.55"]

DIAMETER OF THE CORE ROD: Ø18MM

CRITICAL IMPULSE FLASHOVER VOLTAGE (POS/NEG): 170/190KV

POWER FREQUENCY FLASHOVER VOLTAGE (DRY/WET): 75/65KV

MATERIAL: EPOXY; SILICONE, END FITTING: HOT DIPPED GALVANIZED STEEL

COLOUR: GREY

Manufacturing Standard: ANSI C29.13

28kV, 70kN Dead-End Suspension Insulator

Catalog Number: 910DS28