


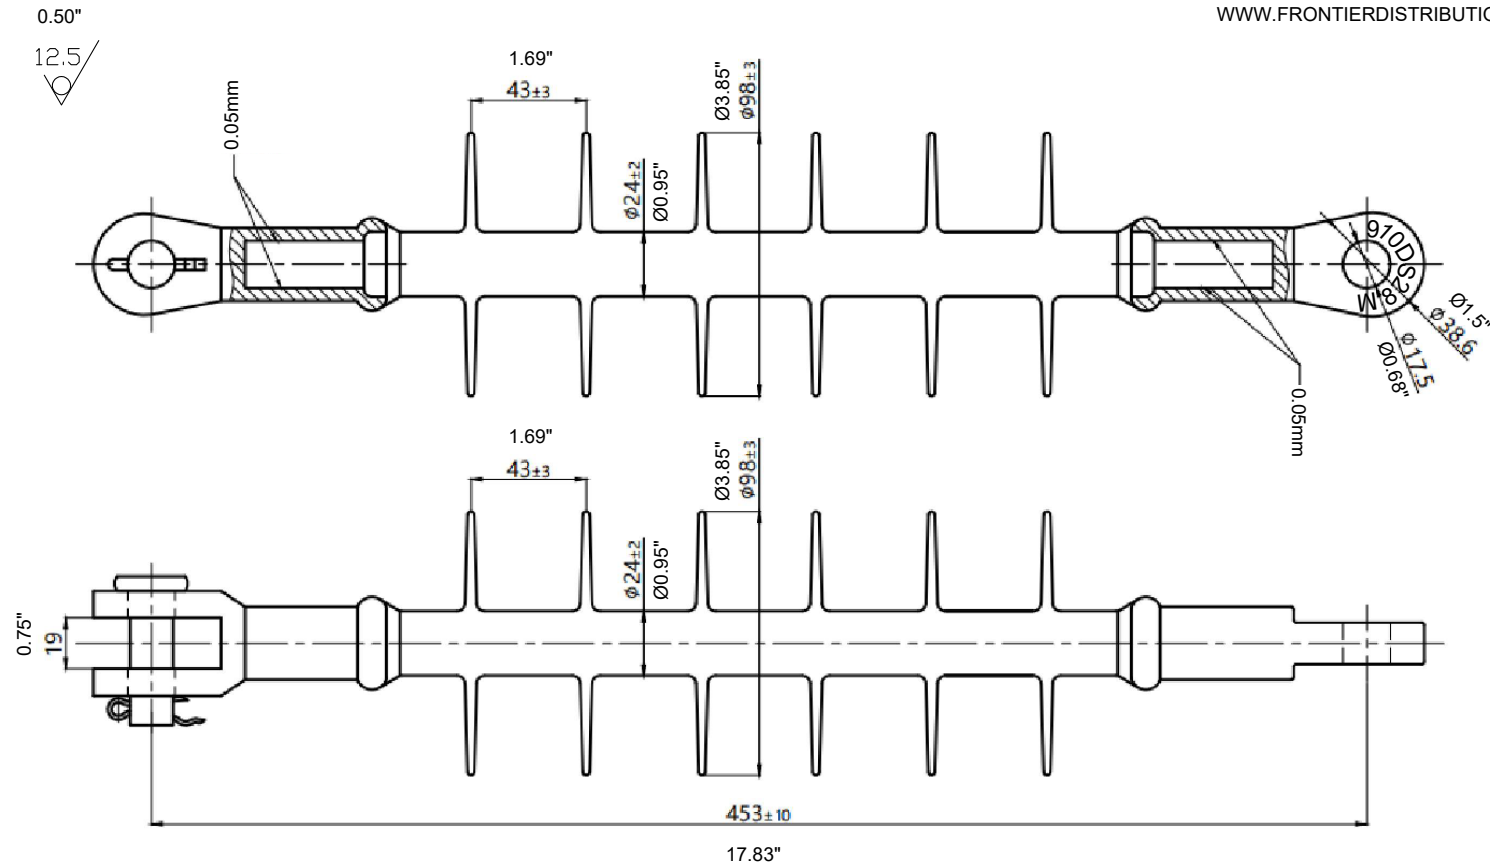

NOTES:

MIN. DRY ARCING DISTANCE: 290MM [11.42"]
 MIN. LEAKAGE DISTANCE: 700MM [27.55"]
 DIAMETER OF THE CORE ROD: Ø18MM
 CRITICAL IMPULSE FLASHOVER VOLTAGE (POS/NEG): 170/190KV
 POWER FREQUENCY FLASHOVER VOLTAGE (DRY/WET): 75/65KV
 MATERIAL: EPOXY; SILICONE, END FITTING: HOT DIPPED GALVANIZED STEEL
 COLOUR: GREY

Manufacturing Standard: ANSI C29.13

28kV, 70kN Dead-End Suspension Insulator

Catalog Number: 910DS28M