


Distributed exclusively by:

**Lakeport Power Ltd.**

169 Industrial Park Road

Colborne, Ontario

www.lakeportpower.com | 905-355-3281

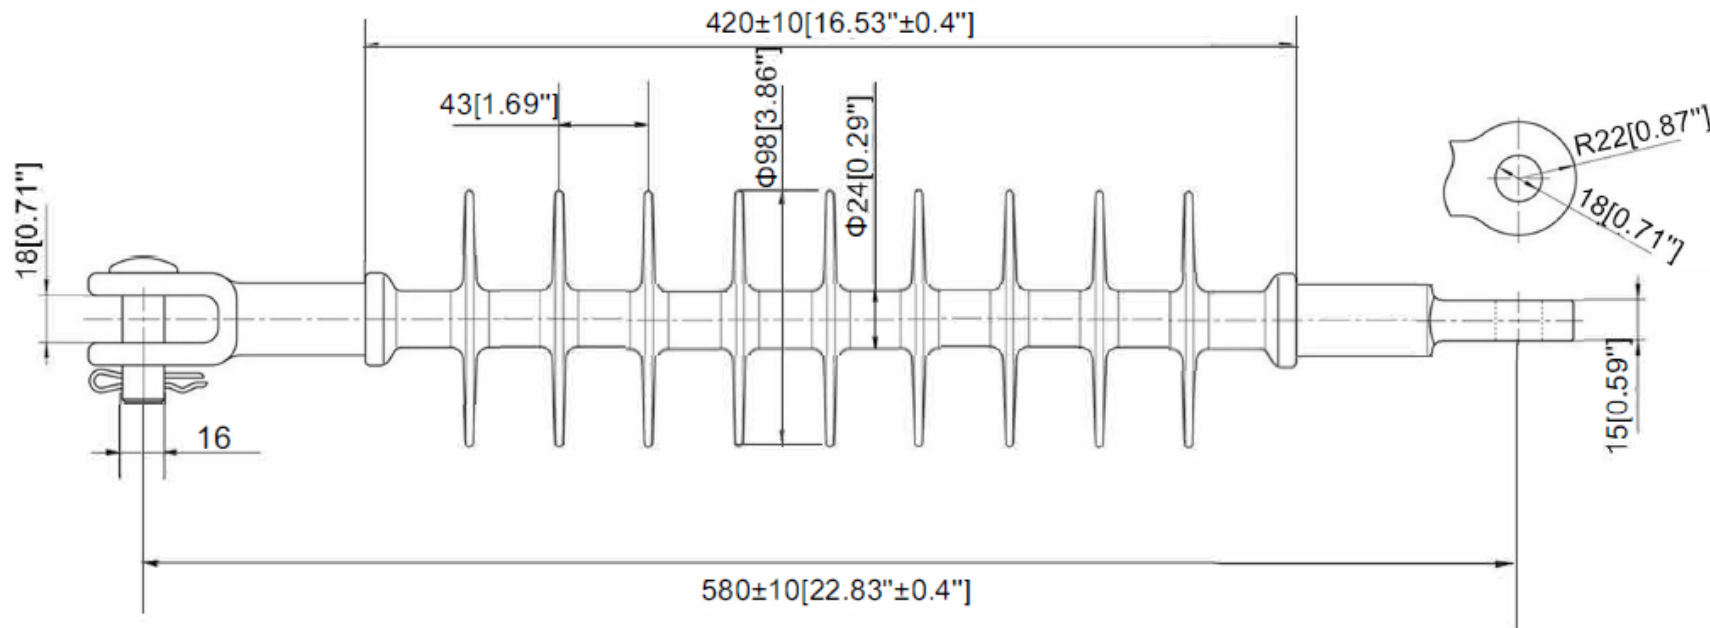

#### NOTES:

MIN. DRY ARCING DISTANCE: 430MM [16.93"]

MIN. LEAKAGE DISTANCE: 1025MM [40.35"]

DIAMETER OF THE CORE ROD: Ø18MM

CRITICAL IMPULSE FLASHOVER VOLTAGE (POS/NEG): 280/300KV

POWER FREQUENCY FLASHOVER VOLTAGE (DRY/WET): 145/180KV

MATERIAL: EPOXY; SILICONE, END FITTING: HOT DIPPED GALVANIZED STEEL

COLOUR: GREY

Manufacturing Standard: ANSI C29.13

**46kV, 70kN Dead-End Suspension Insulator**

**Catalog Number: 910DS46**