


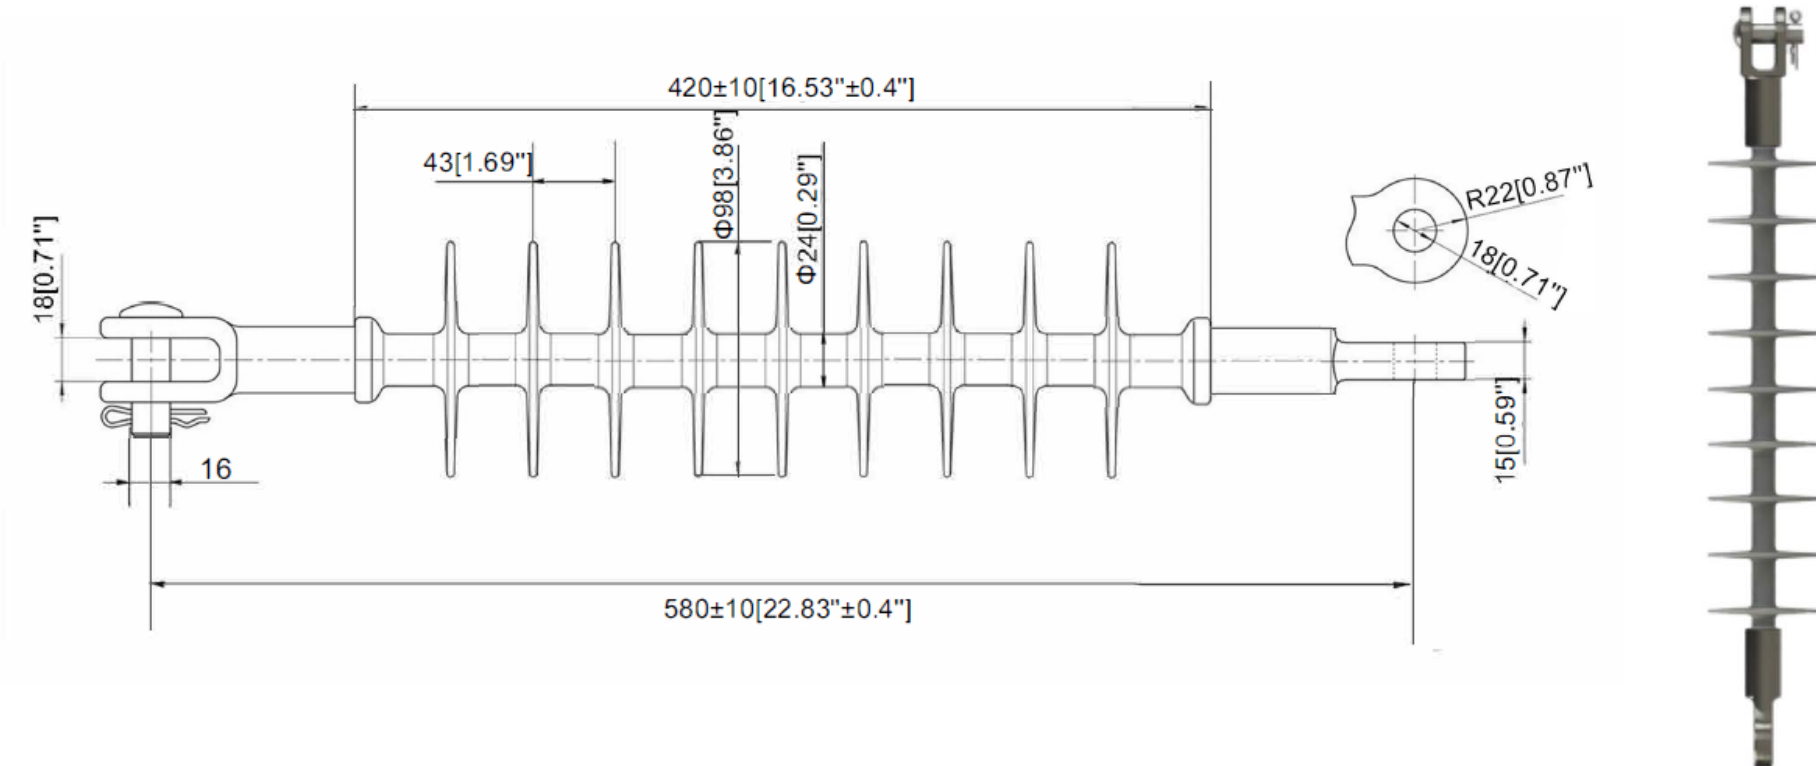

NOTES:

MIN. DRY ARCING DISTANCE: 430MM [16.93"]
 MIN. LEAKAGE DISTANCE: 1025MM [40.35"]
 DIAMETER OF THE CORE ROD: Ø18MM
 CRITICAL IMPULSE FLASHOVER VOLTAGE (POS/NEG): 280/300KV
 POWER FREQUENCY FLASHOVER VOLTAGE (DRY/WET): 145/180KV
 MATERIAL: EPOXY; SILICONE, END FITTING: HOT DIPPED GALVANIZED STEEL
 COLOUR: GREY

Manufacturing Standard: ANSI C29.13

46kV, 70kN Dead-End Suspension Insulator

Catalog Number: 910DS46