



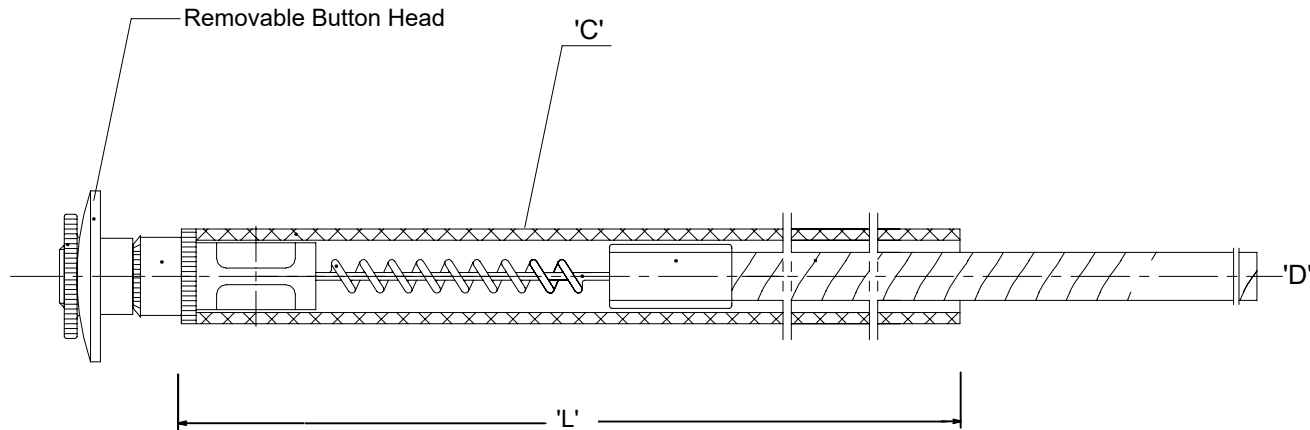

| AMP RATING | 'A' DIA | 'B' DIA | 'C' DIA | 'D' DIA | 'L' DIM |
|------------|---------|---------|---------|---------|---------|
| 1 - 20     | 0.50"   | 0.75"   | 0.311"  | 0.090"  | 5.50"   |
| 25 - 30    | 0.50"   | 0.75"   | 0.311"  | 0.125"  | 5.50"   |
| 40 - 50    | 0.50"   | 0.75"   | 0.311"  | 0.141"  | 5.50"   |
| 65 - 100   | 0.75"   | x       | 0.431"  | 0.203"  | 5.50"   |
| 140        | 1.00"   | x       | 0.460"  | 0.290"  | 6.00"   |
| 200        | 1.00"   | x       | 0.563"  | 0.406"  | 6.00"   |



| CATALOG # | AMPERAGE |
|-----------|----------|
| 801FLK001 | 1K       |
| 801FLK002 | 2K       |
| 801FLK003 | 3K       |
| 801FLK004 | 4K       |
| 801FLK005 | 5K       |
| 801FLK006 | 6K       |
| 801FLK008 | 8K       |
| 801FLK010 | 10K      |
| 801FLK015 | 15K      |
| 801FLK020 | 20K      |
| 801FLK025 | 25K      |
| 801FLK030 | 30K      |
| 801FLK040 | 40K      |
| 801FLK050 | 50K      |
| 801FLK065 | 65K      |
| 801FLK080 | 80K      |
| 801FLK100 | 100K     |
| 801FLK140 | 140K     |
| 801FLK200 | 200K     |

**Fuse Link, Type K (ANSI), 23"L**

**Catalog Number: 801FLK \_ \_ \_**